

PP

028-DIN

Power Supply



The Prolojik PP028-DIN rail power supply is suitable for use with the Prolojik range of DIN rail mounting controllers and interfaces.



Key Features

4 x 15V supply


Industry standard DIN mounting

LED Indication

 www.prolojik.com

 +44 (0) 1495 515 100

 info@prolojik.com

 Perspective House, 7 Cliveden Office Village,
Lancaster Road, High Wycombe, HP12 3YZ

plexus

©2002-2021 Prolojik Limited. All rights reserved.

All wiring must be carried out by a qualified electrician in accordance with the current edition of the wiring regulations and any applicable regional standards.

Prolojik maintains a policy of ongoing improvement, and the information herein is subject to change without notice.



PP

028-DIN

Power Supply

Specification

Features

Low profile power supply
Industry standard DIN rail mounting
Suitable for Prolojik controllers and interfaces
LED indication
Convection cooled
Must be mounted in protective enclosure

Dimensions

99mm x 118mm x 51.6mm (L x W x H)

Weight

0.39Kg

Fixings

Spring retractive DIN rail mounting clip
DIN EN50022

Safety

EN 62368-1

Conformity & Standards

Meets EN 61000-3-2, EN 61000-3-3
UL1310 Class 2
UL508 Listed

Environment

Storage
Temperature: -25°C - +85°C
In Use
Temperature: -25°C - +71°C
Humidity: 20% - 95% non-condensing



Mains Input

230Vac; 50-60Hz
Connection: 3 pole screw terminal
FUSE – 1A (5x20mm)

Output

(4x) 15Vdc; 0.67A
Connection: (4x) 2 pole screw terminal

Technical Data

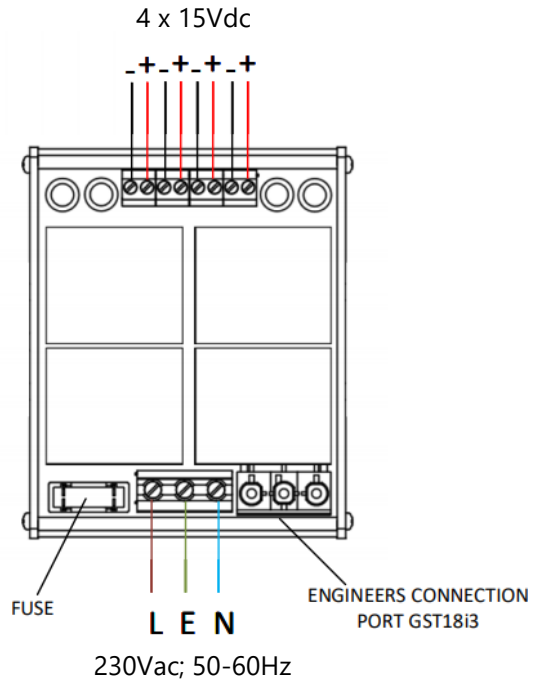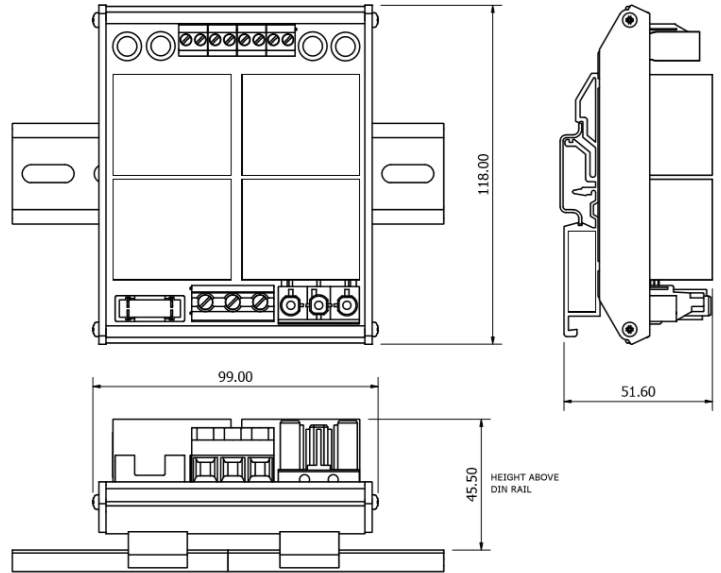

www.prolojik.com



+44 (0) 1495 515 100



info@prolojik.com



Perspective House, 7 Cliveden Office Village,
Lancaster Road, High Wycombe, HP12 3YZ

plexus



©2002-2021 Prolojik Limited. All rights reserved.

All wiring must be carried out by a qualified electrician in accordance with the current edition of the wiring regulations and any applicable regional standards.

Prolojik maintains a policy of ongoing improvement, and the information herein is subject to change without notice.