


Multi Port Sensor Link Connector

The Prolojik PS-LINK is a multi-port link connector enabling connection of multiple Prolojik Proxima PS4xx sensors to the control network.

Operates in conjunction with Prolojik PN463 / PP463 controller hub.

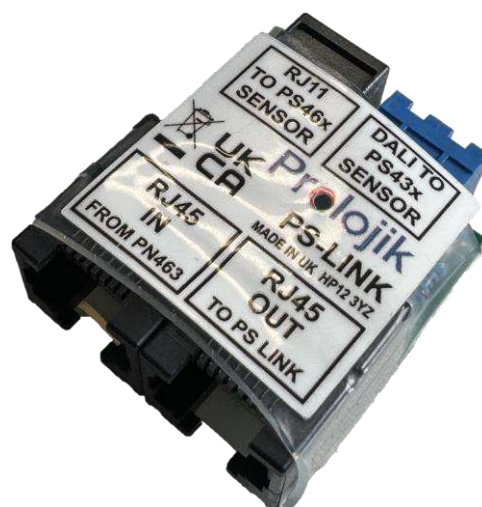

Specification

Features

Loop-In / Loop-Out
LED indication for power

Connections

RJ45 (CAT5E/CAT6) to PP463
RJ45 (CAT5E/CAT6) Loop to next PS-LINK
RJ11 for sensor connection – PS46x sensors
2 pin DALI plug - PS43x sensors

Dimensions

38mm x 32mm x 16mm (L x W x H)

Environment

Storage
Temperature: -10°C - +60°C
Humidity: 0% - 90% non-condensing




In Use

Temperature: 0°C - +40°C
Humidity: 10% - 90% non-condensing

Power Input

12V Proxima power from PN463 via CAT6 Cable

Technical Data

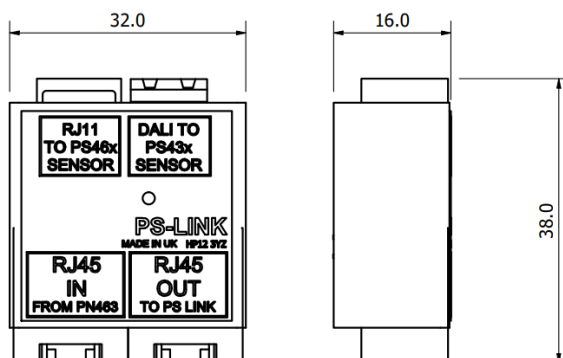

Key Features

- RJ45 CAT5E / CAT6 connection
- DALI connector to PS43x sensors
- RJ11 connector to PS46x sensors
- LED Power Indicator
- RJ45 Loop connect to next PS-LINK

Accessories

- PC032 DALI plug
- PC032T DALI T plug

Prolojik | Perspective House | 7 Cliveden Office Village | Lancaster Road
High Wycombe | Buckinghamshire HP12 3YZ | United Kingdom
+44 (0)1494 515100 | info@prolojik.com | prolojik.com